


THE NEW STANDARD IN FLAT STOCK WELDERS

Micro-Weld FS-5

STANDARD FEATURES

- Designed with low maintenance and easy operator adjustments in mind
- Dual shaft headpiece with linear ball bearings
- Built-in solid state SCR weld control

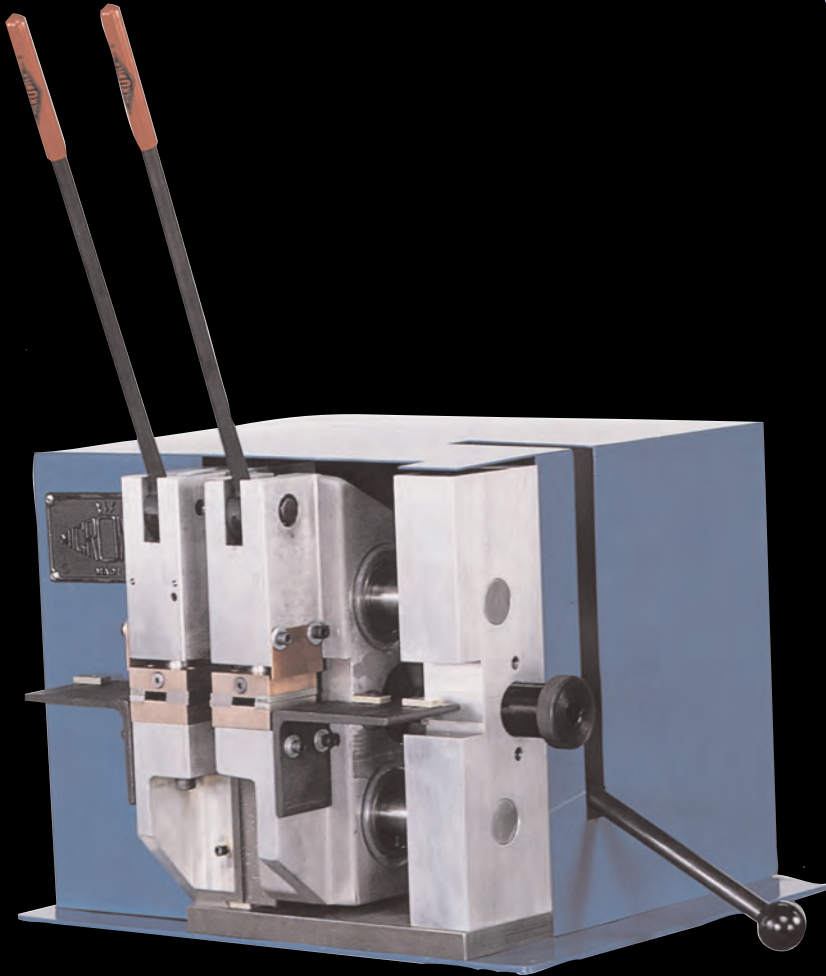

For more information
on Micro-Weld Flat
Stock or other butt
welders, please call
1-800-872-1068.

See Page 2 For Details


MICRO
PRODUCTS COMPANY

MADE IN THE


MODEL FS-5

Specifications

Stock Range

Width 2.0 in. max., .50 in. min.
Thickness .125 in. max., .020 in. min.
Cross sectional area
Low carbon steel .010 to .200 sq. in.
High carbon steel .010 to .150 sq. in.

Material

Steel Flat Stock

Line Current

230 VAC 97 amps @ 10% duty cycle
50/60 Hz 31 amps @ 100% duty cycle
460 VAC 49 amps @ 10% duty cycle
50/60 Hz 16 amps @ 100% duty cycle

Single Phase Transformer

10 KVA @ 50% duty cycle

Heat Selection

Continuous

Upset Pressure Method

Spring type

Clamp Pressure

Spring type

Dimensions And Weight

Overall Height	52"
Weld Die Height	43"
Floor Space	17" x 20"
Weight	265 lbs.

Options

- Choice of 575, 460, 415/380, 230 or 208 operation
- Motor Grinder
- Special flat stock or round stock dies
- Anneal timer



1296 Mark Street •
Bensenville,
Illinois 60106-1022 U.S.A.
Telephone: 630-787-9350
Fax: 630-787-9360
©2008 Micro Products Company
www.micro-weld.com