

Meeting the demands for higher productivity and quality





Micro-Weld Models GC, GS, And GT Butt Welders

Models "GC", "GS", and "GT" have all the features commonly associated with other Micro-Weld butt welders. Ease of operation, heavy duty construction and unsurpassable weld quality have all been engineered into these units.

Quality and productivity backed with over 80 years of experience, service and support. These are some of the reasons why the Micro-Weld name is respected all over the world.

For more information on these or other butt welders from Micro Products, call 1-800-872-1068.

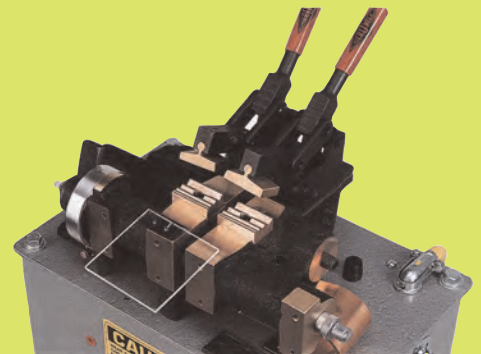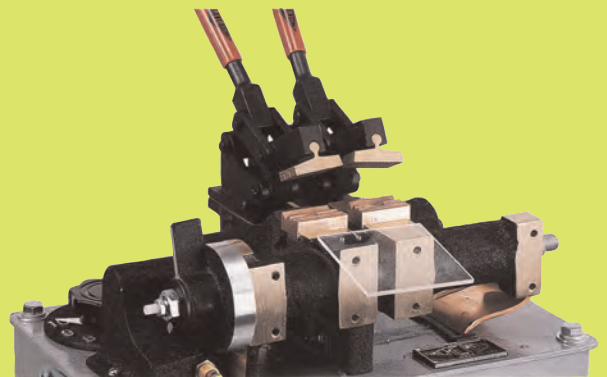

**MADE IN THE
USA**

See Page 2 For Details

MODELS GC, GS, GT

ELECTRIC RESISTANCE BUTT WELDERS

Specifications

	Models for Copper and E.C. Aluminum Wire		Models for Steel Wire	
	Model GC	Model GS	Model GS	Model GT
Type of Weld Process	Butt Welds	Butt Welds	Butt Welds	Butt Welds
Stock Size Range	.040" to .128" 1mm to 3.175mm	.035" to .225" .88mm to 5.56mm	.020" to .150" .51mm to 3.969mm	
Material Suitability	Copper and E.C. Aluminum (.050" to .200")	Steel	Steel	
Operating Voltages	240 volts	240 volts	120 volts	
Input Power Cycle	60 hertz	60 hertz	60 hertz	
Line Demand	40 amperes	15 amperes	25 amperes	
Transformer Rating				
Single Phase A/C	9.6 KVA	3.6 KVA	3.0 KVA	

Dimensions and Weights-All Models

Model	Height Overall	Floor or Bench Space	Welding Die Height	Approximate Weight
Bench Type	20"	15 x 9"	11"	170 lbs.
Truck Type	51"	24" x 24"	42"	214 lbs.

Standard Features

- Sensitive Straight Slide Movable Welding Headpiece
- Adjustable Spring Tension
- Adjustable Limit Switch
- Manual Hand Clamp
- Changeable Welding Dies and Clamp Shoes
- Lamp
- Power Cord
- Safety Flash Guards

Optional Features

- 4-Wheel Post Type Truck
- 4-Wheel Enclosed Truck
- Voltage for 240, 380, 480, or 600
- 50 Hertz Service
- Annealing Devices for all Units



1296 Mark Street • Bensenville
Illinois 60106-1022 U.S.A.

Telephone: 630-787-9350

Fax: 630-787-9360

©2008 Micro Products Company

www.micro-weld.com

Micro-Weld Butt Welders from Micro Products

Model "GC" Non-Ferrous Wire Capacity
.040" to .128" Copper Wire
.050" to .200" E.C. Aluminum Wire

Model "GS" Ferrous Wire Capacity
.035" to .225" Diameter Steel Wire

Model "GT" Ferrous Wire Capacity
.020" to .150" Diameter Steel Wire

Unsurpassed quality
construction

Excellent welds with
consistency

Easy to operate

Customer service
and support